




The world's most trusted OSAs

Optical Spectrum Analyzer Selection Guide



Selection guide

Yokogawa offers diffraction grating based optical spectrum analyzers with high-speed and high-performance that meets the measurement needs of a wide range of R&D and industrial manufacturing applications. An extensive product lineup covers a wide wavelength range from visible to mid-wavelength infrared (350 to 5500 nm). This document will help you choose the best model for your measurement needs.

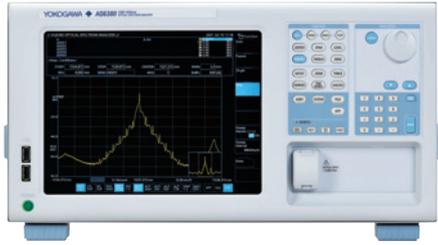

AQ6380, AQ6370E, AQ6373E, AQ6374E, AQ6375E and AQ6376E




AQ6377



AQ6360

Specifications and features

Wavelength band/Feature/Model			Wavelength range (nm)	Wavelength resolution (nm)		Wavelength accuracy (nm)				
				Max.	Min.	VIS 0.6 μm	Optical comm.			Full range
				1.31 μm	1.55 μm	1.6 μm				
VIS	High resolution	AQ6373E	350  1200	10	0.01 ^{*1} (350 to 600 nm) 0.02	±0.05				±0.2
VIS Optical comm.	Wide band	AQ6374E	350  1750	10	0.05	±0.05	±0.2	±0.05	±0.2	±0.2
Optical comm.	High performance	AQ6370E	600  1700	2	0.02		±0.1	±0.008 _{typ.}	±0.015 _{typ.}	±0.1
	Highest performance	AQ6380	1200  1650	2	0.005		±0.05	±0.005	±0.01	±0.05
	High speed & Space saving	AQ6360	1200  1650	2	0.1		±0.1	±0.02	±0.04	±0.1
SWIR	2 μm	AQ6375E	1000  2500 ^{*3}	2	0.05		±0.5	±0.05	±0.1	±0.5
MWIR	3 μm	AQ6376E	1500  3400	2	0.1			±0.5	±0.5	±0.5
	5 μm	AQ6377	1900  5500	5	0.2					±0.5

*1: High resolution model *2: Purge feature for the AQ6360 are available on request. *3: Wavelength extended model

Applications

Optical communications

- Emission spectrum evaluation of optical transceivers, LD chips, and LD modules
- OSNR measurement of WDM transmission signals
- Optical Amplifier testing
- Wavelength-dependent loss characterization of optical fiber



VIS

- Characterization of light sources used in biomedical and consumer products
- Color analysis of visible LED



SWIR MWIR

- Characterization of cascade lasers used in Laser Absorption Spectroscopy
- Characterization of broadband light such as optical frequency combs and supercontinuum light sources
- Spectral measurement of nonlinear lasers such as optical parametric oscillators



VIS: Visible, SWIR: Short-wavelength infrared, MWIR: Mid-wavelength infrared

Close-in dynamic range (dB)						Level sensitivity (dBm)				Applicable fiber			Purge feature	Higher-order diffracted light suppression
Resolution minimum		Resolution 0.02 nm		Resolution 0.1 nm		VIS ≤ 1 μm	Optical comm. 1.3-1.6 μm	SWIR ≤ 2.2 μm	SWIR/MWIR ≥ 2.2 μm	SM	GI	Large core		
60 (±0.5 nm)		60 (±0.5 nm)				-80 typ. (500 to 1000 nm) -60 typ. (400 to 500 nm)				●	●	●		●
60 (±1.0 nm)						-70 (400 to 900 nm)	-80			●	●	●	●	●
45 (±0.1 nm)	58 (±0.2 nm)	45 (±0.1 nm)	58 (±0.2 nm)	50 typ. (±0.2 nm)	67 typ. (±0.4 nm)	-60 (600 to 1000 nm)	-90			●	●	●		
45 (±0.05 nm)	60 (±0.1 nm)	55 (±0.1 nm)	65 (±0.2 nm)	55 typ. (±0.2 nm)	67 typ. (±0.4 nm)		-85			●			●	●
40 (±0.2 nm)	55 (±0.4 nm)			40 (±0.2 nm)	55 (±0.4 nm)		-80			●	●		2	
45 (±0.4 nm)	55 (±0.8 nm)						-62	-67 (1500 to 1800 nm) -70 (1800 to 2200 nm)	-67 (2200 to 2400 nm)	●	●	●	●	●
45 (±1.0 nm)	55 (±2.0 nm)							-65 (1500 to 2200 nm)	-55 (2200 to 3200 nm)	●	●	●	●	●
50 typ. (±5.0 nm)								-40 typ. (1900 to 2200 nm)	-50 typ. (2200 to 2900 nm) -60 typ. (2900 to 4500 nm)	●	●	●	●	●

● : Available

Related products

AQ6150 Series Optical Wavelength Meters

The AQ6150B and AQ6151B Optical Wavelength Meters are fast, accurate and cost-effective instruments for carrying out measurements in the telecommunications wavelength range from 900 to 1700 nm.



AQ2200 Series Multi-Application Test System (MATS)

The AQ2200 series is an ideal test platform for measuring and evaluating a variety of optical devices and transmission systems.

Various measurement modules can be mounted in any combination on a single frame.

Frame and module lineup:

Products	Descriptions
Frame controllers	3 slots type, 9 slots type
Light source modules	High output level stability light sources, Grid TLS
Sensor modules	High power type, Large-diameter sensor head, dual sensor type
Optical attenuator modules	Standard type, with monitor output, with built-in monitor power meter
Optical switch modules	1×2, 2×2, 1×4, 1×8, and 1×16 channels
Modules for Optical Transceiver	—



*For more information about the features and specifications of the each product, please refer to the brochure (AQ6380-01EN, AQ6370SR-20EN, AQ6360-01EN).

Yokogawa's Approach to Preserving the Global Environment

- Yokogawa's electrical products are developed and produced in facilities that have received ISO14001 approval.
- In order to protect the global environment, Yokogawa's electrical products are designed in accordance with Yokogawa's Environmentally Friendly Product Design Guidelines and Product Design Assessment Criteria.

YOKOGAWA

YOKOGAWA TEST & MEASUREMENT CORPORATION
Global Sales Dept. /E-mail: tm@cs.jp.yokogawa.com

YOKOGAWA CORPORATION OF AMERICA
YOKOGAWA EUROPE B.V.
YOKOGAWA TEST & MEASUREMENT (SHANGHAI) CO., LTD.
YOKOGAWA ELECTRIC KOREA CO., LTD.
YOKOGAWA ENGINEERING ASIA PTE. LTD.
YOKOGAWA INDIA LTD.
YOKOGAWA ELECTRIC CIS LTD.
YOKOGAWA AMERICA DO SUL LTDA.
YOKOGAWA MIDDLE EAST & AFRICA B.S.C(c)

<https://tmi.yokogawa.com/us/>
<https://tmi.yokogawa.com/eu/>
<https://tmi.yokogawa.com/cn/>
<https://tmi.yokogawa.com/kr/>
<https://tmi.yokogawa.com/sg/>
<https://tmi.yokogawa.com/in/>
<https://tmi.yokogawa.com/ru/>
<https://tmi.yokogawa.com/br/>
<https://tmi.yokogawa.com/bh/>

<https://tmi.yokogawa.com/>

YMI-N-MI-M-E03

The contents are as of July 2023. Subject to change without notice.
Copyright © 2021, Yokogawa Test & Measurement Corporation
[Ed: 04/b] Printed in Japan, 307(KP)