


# TRANSFORMER

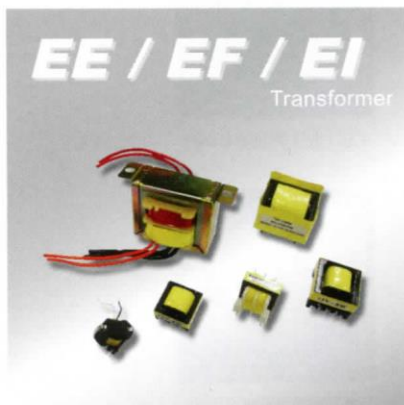

Type 型式(ex.)	Packaging Pcs (MOQ)
EE-16	100
EE-19	100
EF-20	100
EI-19	100

\*Design as customer's requested specifications (可依客戶特殊需求設計)

# EMI CORE



Type 型式(ex.)	Packaging Pcs (MOQ)
LF-35(B)	100
LF-50(B)	100
LF-65(B)	100
LF-75(B)	100
LF-130(B)	100

\*Have lot of dimensions to choose (提供多樣化的規格可供選擇)

# SMD POWER INDUCTOR




Type 型式	Inductance 電感值L(uH)	IDC 定格電流 (A)	DCR 直流阻抗(Ω)	Packaging Pcs/Reel
DS1608F	1.0 - 1000	2.9 - 0.1	0.05 - 13.8	2000
DS3316F	1.0 - 1000	9.0 - 0.3	0.009 - 3.0	700
DS3340F	1.0 - 1000	8.0 - 0.8	0.04 - 2.0	700
DS5022F	1.0 - 1000	20.0 - 1.0	0.009 - 1.8	400

\*Please specify the inductance tolerance, K(±10%), M(±20%), N(±30%)

## SMD Choke、Inductor、EMI Core

### SMD POWER CHOKE


Series	Appearance	height (mm) MAX	PartNumber	Specifications
<a href="#">SNR</a>		1.0-4.5	3010-6045	L:0.9uH-100uH IDC:--6.6A(MAX)
<a href="#">SC</a>		1.8-5.0	31-105	L:1.0uH-1.0mH IDC:--3.6A(MAX)
<a href="#">SCR-B</a>		3.5-5.9	63B-125B	L:4.7uH-820uH IDC:--6.0A(MAX)
<a href="#">SCB-F</a>		3.2-4.9	63F-104F	L:1.0uH-1.0mH IDC:--5.5A(MAX)
<a href="#">SCB-C</a>		3.3-8.0	73C-1275C	L:1.0uH-560uH IDC:--3.12A(MAX)
<a href="#">SCD-F</a>		2.92-11.43	1608-5040	L:1.0uH-1.0mH IDC:--24A(MAX)
<a href="#">SCD-C</a>		2.92-7.62	1608-5020	L:1.0uH-10mH IDC:--8.0A(MAX)
<a href="#">SBC</a>		2.0-3.5	62-63	L:1.0uH-100uH IDC:--5.0A(MAX)
<a href="#">SGRH-D</a>		0.9-4.0	2D08-6D38	L:1.0uH-150uH IDC:--3.5A(MAX)
<a href="#">SGRH-8D</a>		3.0-4.7	8D28-8D43	L:2.5uH-100uH IDC:--6.4A(MAX)

# DIP POWER INDUCTOR FOR CUSTOMER DESIGN




Type 型式(ex.)	Packaging Pcs (MOQ)
RB3X12	100
RB5X10	100
RB5X20	100
RB6X25	100

\*Have lot of dimensions to choose (提供多樣化的規格可供選擇)

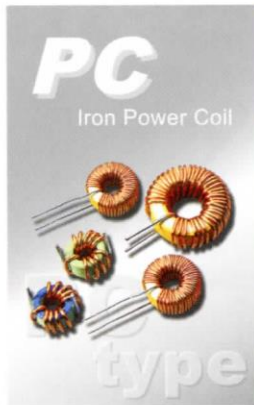

Type 型式(ex.)	Packaging Pcs (MOQ)
PC4452	100
PC5026	100
PC5052	100
PC6852	100

\*Design as customer's requested specifications (可依客戶特殊需求設計)

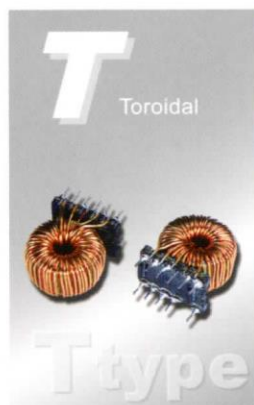

Type 型式(ex.)	Packaging Pcs (MOQ)
T9X5X3	200
T12X6X4	200
T14X8X7	200
T16X12X8	200

\*Design as customer's requested specifications (可依客戶特殊需求設計)